

FIREKING® DATA AND MEDIA SAFES – Designed to protect sensitive magnetic and digital storage media from heat, humidity, dust and magnetic fields, our Data Safes carry UL® Class 125 1-, 2-, or 3-Hour Fire and Impact Ratings. We also offer a Mixed Media Safe for protecting both paper files and storage media, plus the ultra-compact and convenient MediaVault™. Use the following information to select the model that best fits your storage and protection needs.



1-, 2-, and 3-Hour Safes shown with Composite Drawers and Fixed Shelves (sold separately).

Safe shown with optional interiors (sold separately).

FIREKING® 1-HOUR FIRE WITH IMPACT-RATED DATA SAFES

A wide range of interiors for storing magnetic media make these safes a versatile and economical choice. Computer media is easily damaged. Manufacturers recommend storing magnetic media at a temperature below 125°F and at a humidity level under 80%. Even a hot mug of coffee represents a real hazard, so imagine what a fire would do. In a FireKing Data Safe, computer media is protected from fire, dust, magnetic fields, unauthorized access, accidental damage and electrostatic discharge. The 1-Hour Data Safe comes in two convenient sizes, DS1513 and DS1817, and both carry the Underwriters Laboratories® (UL®) Class 125 1-Hour Fire and Impact Rating*.

- FEATURES:**
- Equipped with a high-security key lock
 - Safe is offered in our attractive Light Gray color (RAL9002)




- OPTIONAL INTERIORS**
- CS12-FS Fixed shelf for DS1513-1
 - CS12-CD Composite drawer for DS1513-1
 - CS16-FS Fixed shelf for DS1817-1
 - CS16-CD Composite drawer for DS1817-1

FIREKING® 2-HOUR FIRE WITH IMPACT-RATED DATA SAFES

An ideal way to store all types of magnetic media and protect them against fire, dust and accidental damage, they are available in 5 sizes to accommodate your storage needs. These affordable safes provide the ultimate in protection by incorporating layers of heat-absorbing material, fireproof insulating foam and fireproofing with a tough steel casing. Three-way boltwork ensures that doors remain shut if a building collapses during a fire or if a forced entry is attempted. Each FireKing 2-Hour Safe carries a UL® Class 125 2-Hour Fire and Impact Rating*.

- FEATURES:**
- Programmable electronic lock for security and easy access
 - Safe is offered in our attractive Light Gray color (RAL9002)
 - Optional interiors allow various configurations to meet your storage needs



- OPTIONAL INTERIORS**
- CS20-FS Fixed shelf for DS2320/3420/4520-2/6420-2
 - CS20-CD Composite drawer for DS2320/3420/4520/6420-2
 - CS31-FS Fixed shelf for DS6431-2
 - CS31-CD Composite drawer for DS6431-2

FIREKING® 3-HOUR FIRE WITH IMPACT-RATED DATA SAFES

The ultimate in protection against fire, dust, electrostatics and accidental damage for your computer media, our highest rated safes are perfect for businesses with large-capacity electronic storage needs. FireKing 3-Hour Data Safes are available in 5 sizes, all featuring the UL® Class 125 3-Hour Fire and Impact Rating*, plus the UL Residential Security Container (RSC) Burglary Rating for tough protection against break-in.

- FEATURES:**
- Programmable electronic lock for security and easy access
 - Safe is offered in our attractive Platinum finish
 - UL RSC Burglary Rating
 - UL Class 125 3-Hour Fire and Impact Rating
 - Canadian UL Class 52 3-Hour as to fire and impact resistance



- OPTIONAL INTERIORS**
- CM12-FS Fixed shelf for DM1413/DM2513
 - CM12-CD Composite drawer for DM1413/DM2513
 - CM19-FS Fixed shelf for DM2520/DM3420/DM4420
 - CM19-CD Composite drawer for DM2520/DM3420/DM4420

FIREKING® DC-SERIES DATA SAFES

Our most affordable Data Safes, the DC-Series provides top-notch strength and safety features for those on a budget. Offering protection from humidity, dust and magnetic fields, these safes also carry a UL® Class 125 1-Hr. Fire Rating. Galvanized steel plate construction ensures strength and reliability – while minimizing any risk of corrosion. And the 125° door angle provides full access to extendable shelves. The five available models come standard with electronic locks, and are customizable with the combination of shelves and drawers that best fits your media storage needs.

- OPTIONAL INTERIORS**
- CC21-FS Adjustable shelf for DC2123
 - CC23-FS Adjustable shelf for DC2923/DC3523
 - CC31-FS Adjustable shelf for DC2931/DC3531
 - CC23-CD Composite drawer for DC2923/DC3523
 - CC31-CD Composite drawer for DC2931/DC3531

FIRE RATING TEST PROCEDURE

*Maintain an interior temperature less than 125°F and an interior relative humidity less than 80% for Class 125, when exposed to fire as per the Standard Time Temperature Curve – for 1 hour to 1700°F., for 2 hours to 1850°F., and for 3 hours to 1925°F. Successfully undergo all other requirements for the Fire Endurance Test, the Explosion Hazard Test, the Humidity Test, and the Fire and Impact Test.

FIREKING® MIXED MEDIA SAFE

The ultimate in versatile protection – because it's really two safes in one. The top section is a UL® Class 350 1-Hour Impact Rated safe with over 6 cubic feet of storage for your important paper records and files. The bottom is a UL Class 125 3-Hour Impact Rated data media compartment to hold your CDs, tapes, discs and other media.

- MEDIA COMPARTMENT OPTIONAL INTERIORS**
- CM19-FS Fixed shelf
 - CM19-CD Composite drawer

- PAPER COMPARTMENT OPTIONAL INTERIORS**
- S-21 Fixed shelf

FIREKING® MEDIAVAULT™














































A compact, affordable, stand-alone storage safe that is designed to protect heat-sensitive valuables, including data and information storage media. Whether it's microfiche, photographs or computer data on virtually any standard media (see below), the MediaVault will protect it from dust and fires of up to 1700°F. The MediaVault is the only compact and affordable media safe of its size designed to meet UL® Class 125, one-hour specification for insulated records protection equipment. This specification ensures that the interior temperature of the storage device does not exceed 125°F when exposed to a fire of 1700°F for a period of one hour and during that time the interior relative humidity does not exceed 85%RH. The MediaVault is equipped with a key lock conveniently located on the lid for added security.

CAPACITY GUIDE

3.5" Diskettes.....	130	CDR/DVDR.....	40
Mini DVC 60.....	50	DLT.....	12**
4mm DAT.....	60	3480/3590.....	9
8mm DAT.....	30	ZIP® Disk 100.....	31
Travan.....	23	DV CAM Cassettes.....	22

**Without plastic sleeves.

SPECIFICATIONS

MODEL	Ratings	Interior Size			Exterior Size			Weight	Capacity
		H	W	D	H	W	D*		
FIREKING® 1-HOUR FIRE WITH IMPACT-RATED DATA SAFES									
DS1513-1LG	  	14 3/8"	12 7/16"	12 7/16"	25 1/2"	21 1/2"	22 2/8"	297 lbs.	1.3 cu. ft.
DS1817-1LG	  	17 4/8"	16 3/8"	17"	28 3/8"	25 1/2"	26 3/8"	429 lbs.	2.8 cu. ft.
FIREKING® 2-HOUR FIRE WITH IMPACT-RATED DATA SAFES									
DS2320-2	  	22 1/2"	19 5/16"	15 13/16"	36 1/8"	29 7/16"	30"	680 lbs.	4.04 cu. ft.
DS3420-2	  	33 9/16"	19 5/16"	15 13/16"	47 3/16"	29 7/16"	30"	880 lbs.	5.41 cu. ft.
DS4520-2	  	44 9/16"	19 5/16"	15 13/16"	58 1/4"	29 7/16"	30"	1,070 lbs.	8.07 cu. ft.
DS6420-2	  	63 1/8"	19 5/16"	15 13/16"	76 13/16"	29 7/16"	30"	1,380 lbs.	10.78 cu. ft.
DS6431-2	  	63 1/8"	30 3/4"	18 9/16"	76 13/16"	40 7/8"	32 3/16"	1,870 lbs.	20.6 cu. ft.
<i>See your dealer for the complete selection of interior designs.</i>									
FIREKING® 3-HOUR FIRE WITH IMPACT-RATED DATA SAFES									
DM1413-3	  	13 5/8"	11 1/2"	16 11/16"	29 5/8"	25 1/4"	31"	650 lbs.	1.5 cu. ft.
DM2513-3	  	24 5/16"	11 1/2"	16 11/16"	40 1/4"	25 1/4"	31"	740 lbs.	2.7 cu. ft.
DM2520-3	  	24 15/16"	18 5/8"	16 11/16"	40 1/4"	32 1/16"	31"	1,050 lbs.	4.4 cu. ft.
DM3420-3	  	33 1/8"	18 5/8"	16 11/16"	49 1/16"	32 1/16"	31"	1,240 lbs.	6.0 cu. ft.
DM4420-3	  	43 5/8"	18 5/8"	16 11/16"	59 3/4"	32 1/16"	31"	1,420 lbs.	7.9 cu. ft.
FIREKING® DC-SERIES DATA SAFES									
DC-2123		13 7/8"	15 1/4"	13"	21"	22 3/8"	21 3/8"	275 lbs.	1.55 cu. ft.
DC-2923		21 3/4"	15 1/4"	16 1/4"	28 7/8"	22 3/8"	24 1/2"	405 lbs.	3.05 cu. ft.
DC-3523		27 3/4"	15 1/4"	16 1/4"	34 7/8"	22 3/8"	24 1/2"	495 lbs.	3.90 cu. ft.
DC-2931		21 3/4"	23 3/4"	18 7/8"	28 7/8"	30 7/8"	27 1/8"	575 lbs.	5.50 cu. ft.
DC-3531		27 3/4"	23 3/4"	18 7/8"	34 7/8"	30 7/8"	27 1/8"	640 lbs.	7.00 cu. ft.
FIREKING® MIXED MEDIA SAFE									
DP2150-M	  	19 1/2"	26 3/4"	20 29/32"	59 3/4"	32 1/16"	31"	1,290 lbs.	6.1 cu. ft.
Paper compartment									6.1 cu. ft.
Media compartment									4.4 cu. ft.
FIREKING® MEDIAVAULT™									
MV1000		5 7/8"	6 1/4"	8 7/8"	10 1/2"	11 5/8"	17 1/2"	74 lbs.	

*Exterior depth does not include handle. Handle depth is 1 3/4".

CAPACITY CHART

MEDIA TYPE	3.5" Diskettes		3480 IBM Cartridges		4mm DAT Tapes		8mm DAT Tapes		CD-ROM		DLT Tapes		ZIP® PC 100	
	Quantity per drawer	Number of drawers	Quantity per drawer	Number of drawers	Quantity per drawer	Number of drawers	Quantity per drawer	Number of drawers	Quantity per drawer	Number of drawers	Quantity per drawer	Number of drawers	Quantity per drawer	Number of drawers
FIREKING® 1-HOUR FIRE WITH IMPACT-RATED DATA SAFES														
DS1513-1LG	264	3	26	2	60	3	32	3	58	2	18	3	58	3
DS1817-1LG	480	4	45	3	108	4	63	4	108	3	39	3	111	4
FIREKING® 2-HOUR FIRE WITH IMPACT-RATED DATA SAFES														
DS2320-2	596	5	51	4	124	5	79	5	117	3	48	4	135	5
DS3420-2	596	9	51	6	124	9	79	9	117	5	48	7	135	7
DS4520-2	596	11	51	8	124	11	79	11	117	7	48	9	135	10
DS6420-2	596	16	51	12	124	16	79	16	117	10	48	14	135	15
DS6431-2	1124	15	99	14	239	15	148	15	225	12	94	14	254	15
FIREKING® 3-HOUR FIRE WITH IMPACT-RATED DATA SAFES														
DM1413-3	306	3	28	2	70	4	39	4	70	2	24	2	73	3
DM2513-3	306	6	28	4	70	7	39	7	70	4	24	5	73	5
DM2520-3	536	6	51	4	125	7	72	7	123	4	42	5	128	5
DM3420-3	536	8	51	6	125	10	72	10	123	5	42	6	128	7
DM4420-3	536	10	51	8	125	13	72	13	123	7	42	8	128	9
FIREKING® DC-SERIES DATA SAFES														
DC-2123	Adjustable shelf only.													
DC-2923	450	4*	42	4*	102	4*	59	4*	100	4*	34	4*	104	4*
DC-3523	450	5*	42	5*	102	5*	59	5*	100	5*	34	5*	104	5*
DC-2931	866	4*	77	4*	186	4*	115	4*	175	4*	73	4*	198	4*
DC-3531	866	5*	77	5*	186	5*	115	5*	175	5*	73	5*	198	5*
<i>*Maximum number of drawers.</i>														
FIREKING® MIXED MEDIA SAFE														
DP2150-M	536	6	51	4	125	7	72	7	123	4	42	5	128	5

See inside for MediaVault™ capacities. Capacity guides are based on average media sizes.



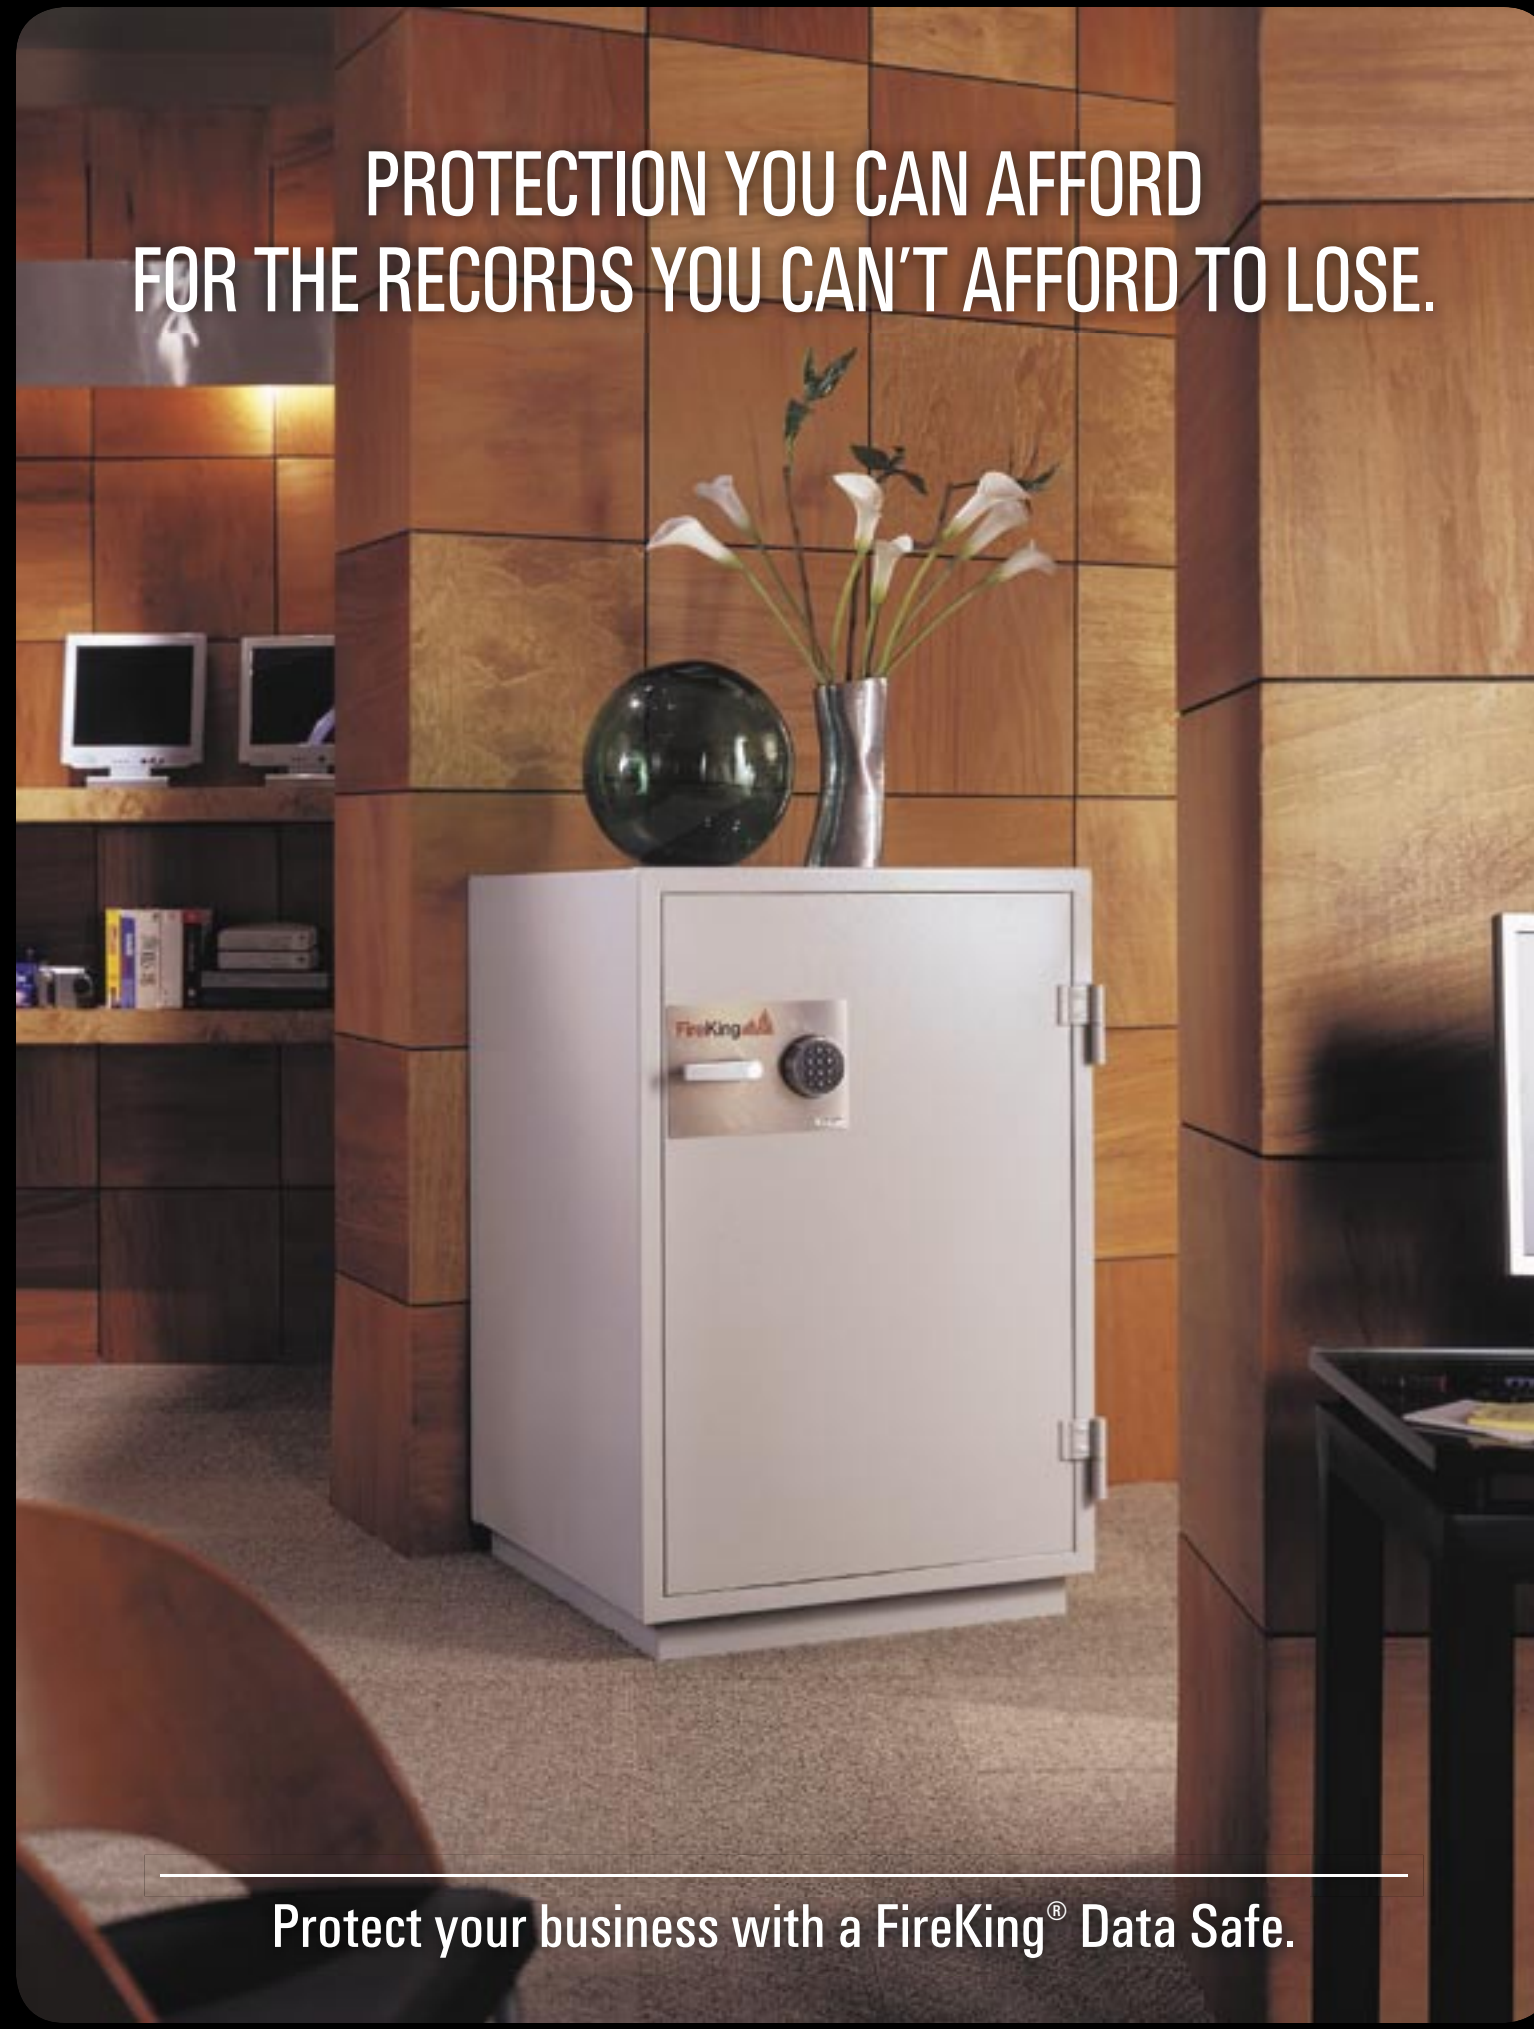
The Best Records Protection You Can Buy

101 Security Parkway New Albany, IN 47150 • 812.948.8400 • 800.457.2424 • fax 812.948.0437 • www.firekingoffice.com

A member of the FireKing® Security Group.

F-0906-02

PROTECTION YOU CAN AFFORD
FOR THE RECORDS YOU CAN'T AFFORD TO LOSE.



Protect your business with a FireKing® Data Safe.